



NB2U-EPC621D8A 2U Rack-mount Server

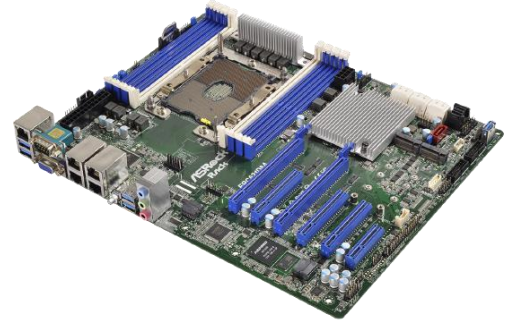

PRODUCT HIGHLIGHTS



Support 1 x Intel® Xeon® Scalable Processor



Up to 12 x Hot-plug 3.5" Disks + 2 x 2.5" Internal Disk Bays



Single Fixed or Redundant Hot-Plug Power Supply Unit



On-Board Intel® Rapid Storage RAID 0/1/10



KVM over IP Support

Form Factor	625 x 482.6 x 87mm (12-bay model) 572.7 x 444.2 x 87mm (8-bay model)
Processor	(1) Intel® Xeon® Scalable Processor
Chipset	Intel® C621 chipset
Memory	(8) DDR4 3200/2933/2666/240 ECC RDIMM/LRDIMM slots
Storage	(12) 3.5" Hot-plug disk bays or (8) 3.5" Hot-plug disk bays (front bays) (2) 2.5" Hot-plug disk (Internal bay)
SATA Controller	Intel® C621: 13 x SATA3 (including 1 SATA DOM ports and 2 M.2 ports)
Expansion Slot(s)	(2) PCIe 3.0 x16 (3) PCIe3.0 x8 (1) PCIe 3.0 x4
Network	(4) Marvell 88E1543 1GbE RJ45 port (1) Realtek RTL8211E 1GbE RJ45 Dedicated port for Management
Integrated Graphics	Asped AST2500 256MB DDR4 video memory
Rear I/O	(4) USB 3.0 Ports (1) VGA Port (4) 1GbE RJ45 Ports (1) 1GbE RJ45 Port (Management) (1) Serial Port
Front I/O	(1) USB 3.0 Ports
Power Supply	(1) Fixed 500W 80 PLUS Gold PSU or (2) Hot-Plug 550W/800W 80 PLUS Platinum PSU
Server Management	IPMI v2.0 compliant, on board "KVM over IP" support
Environment	Operating temperature: 10°C ~ 35°C / Non-operating temperature: -40°C ~ 70°C



Serveron Sdn Bhd

Unit C-6-15, Block C, Southgate Commercial Complex, No. 2, Jalan Dua, Chan Sow Lin, 55200 Kuala Lumpur, Malaysia

Main: 1-700-81-7837 Fax: +603-9226-0771

Email: sales@serveron.com.my For more information, please visit www.serveron.com.my



Assembled in Malaysia